


# BME, BMET

High-Pressure Booster Modules  
50/60 Hz

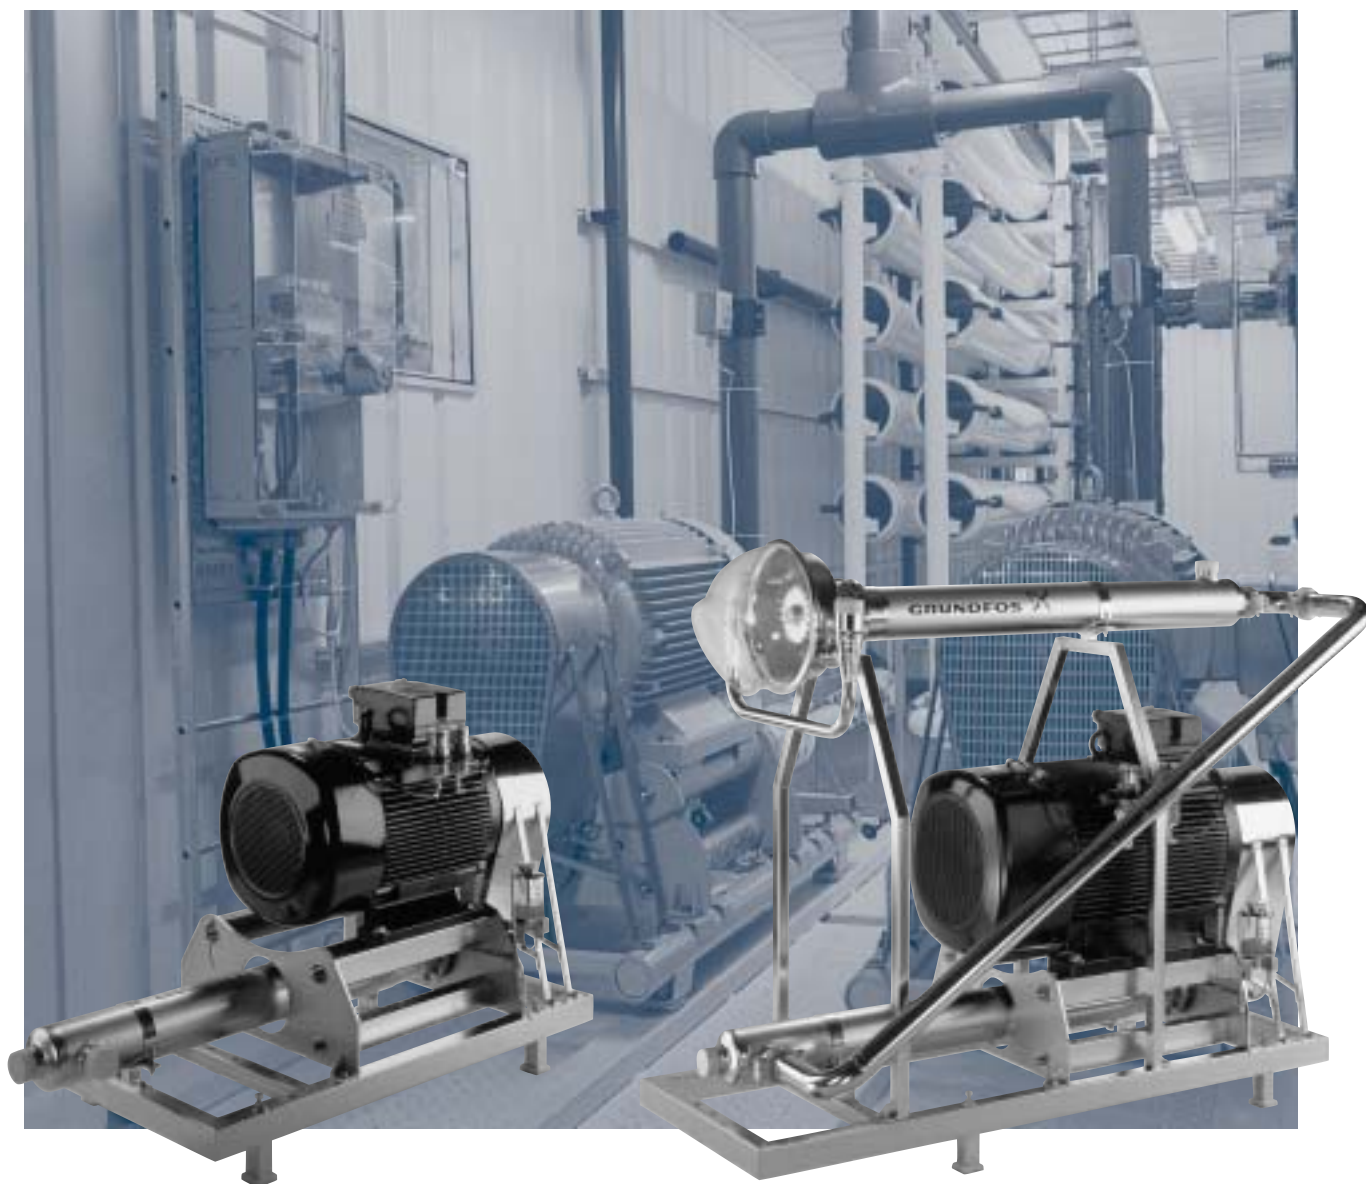

## Applications

- Water treatment in ultra-filtration systems.
- Water treatment in reverse osmosis systems.
- Water pressure boosting systems.
- Water supply.

## Operating conditions

Flow: 20-95 m<sup>3</sup>/h.  
Head: Max. 70 bar.  
Ambient temperature: According to IEC.  
Inlet pressure: BME: 1-30 bar.  
BMET: 2-5 bar.

## Construction

Grundfos multi-stage submersible pump built into a stainless steel sleeve. The pump is powered via a v-belt pulley head by means of an electric standard motor. The pulley ball bearing features an automatic lubricating and cooling system.

The axial thrust from the pump is absorbed by a built-in thrust bearing.

BMET modules consist of a BME module with a second Grundfos submersible pump which is powered via a Pelton turbine and connected in series with the first pump. The modules are designed for use in reverse osmosis systems where the energy from the resulting high-pressure concentrate is recovered by the turbine. This gives energy savings of up to 34% compared to conventional systems. The shaft seal is made of carbon/silicon carbide, specially designed for high pressures. The rubber bearings in the pump are water-lubricated, and ball bearings in the motor are grease-lubricated.




## Connections

Suction and discharge connections: PJE (Victaulic) coupling 3",  $\phi$ 76 mm.

Outlet, turbine: Hose connection  $\phi$ 300 mm.

## Product features

- High-grade stainless steel used in pump and frame.
- Large flows and high heads.
- Energy recovery up to 34% means very short payback time for turbine pump module (BMET).
- Motor and bearings are standard components.
- Maintenance-free shaft seal.
- V-belt drive with high efficiency.
- Easy to start up.
- Easy to dismantle for service.

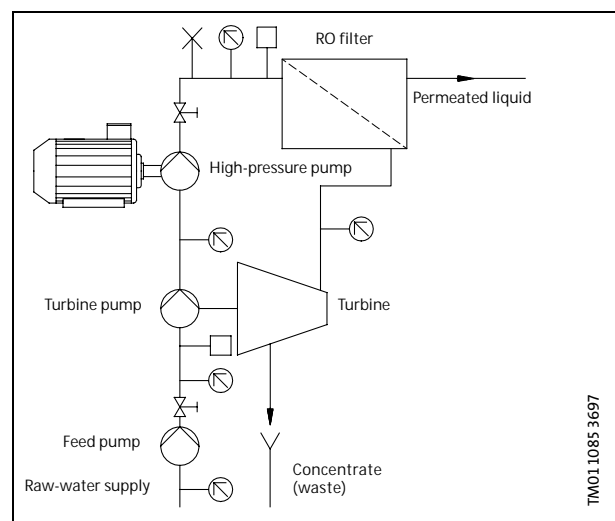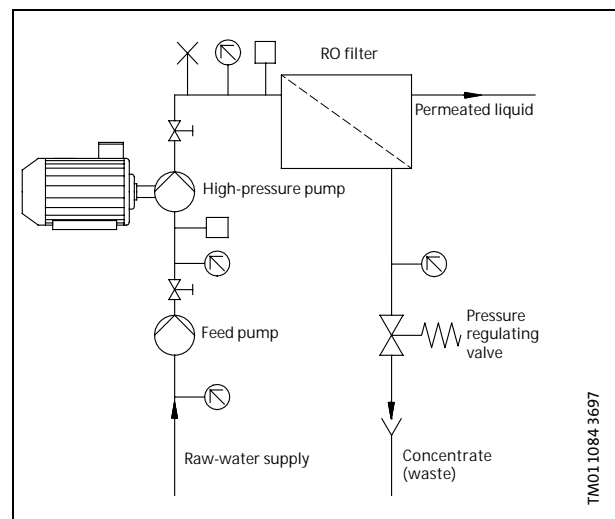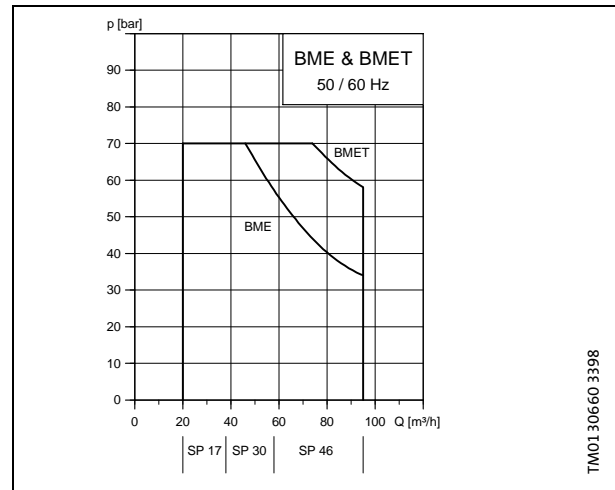

V7 08 97 80 11 02	GB
Repl. V7 08 97 80 09 98	

Subject to alterations.